




SCHEUCHER®

Product description Scheucher Holzindustrie GmbH

WOODflor NOVOLOC® 5G

3-layer-parquet, according to EN13489

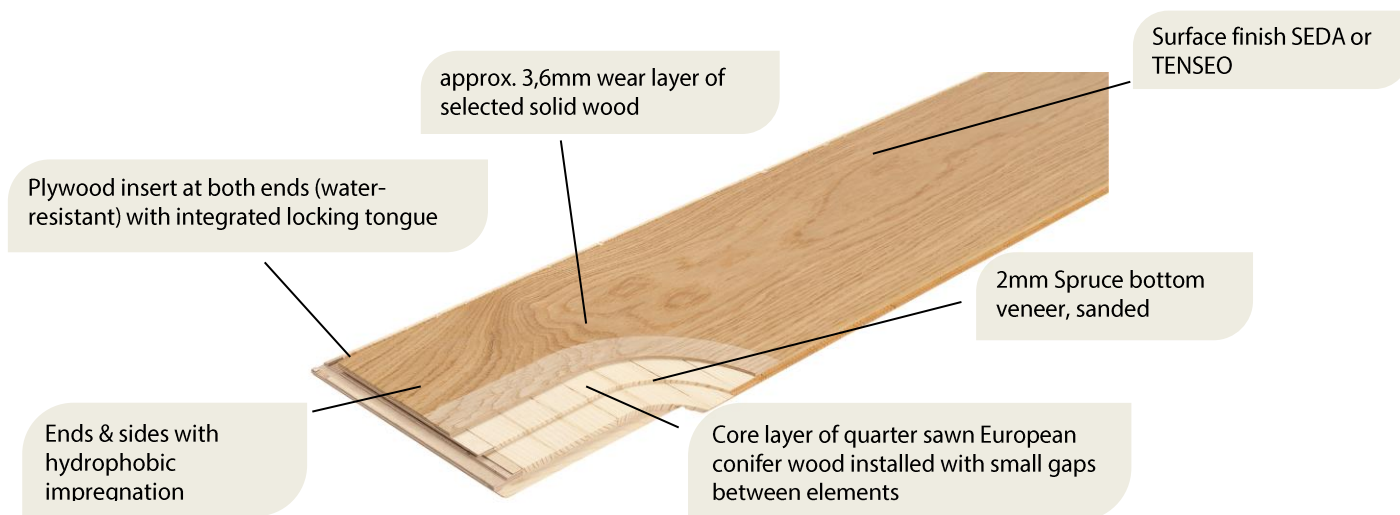

Product description Multilayer parquet with a 3-layer construction for glueless installation

Product	WOODflor NOVOLOC® 5G 222	WOODflor NOVOLOC® 5G 182	WOODflor NOVOLOC® 5G 140	WOODflor NOVOLOC® 5G 182 3-Strip
Dimension [mm]	2200 x 222 x 14	2200 x 182 x 14	2200 x 140 x 14	2200 x 182 x 14
Packaging	6 Stk./Pak. = 2,930 m ²	6 Stk./Pak. = 2,402 m ²	6 Stk./Pak. = 1,848 m ²	6 Stk./Pak. = 2,402m ²

Installation glueless installation, floating or fully glued down

Glue UF(thermosetting)-E1-glue


Fire protection class C_{fi}-s1 when fully glued down, otherwise D_{fi}-s1

Underfloor heating suitable, R_T = 0,101 m²K/W

Surface **TENSEO:** UV-coatings from Bona, Sweden. Our UV-coatings are solvent-free as well as emission-free, have a solid content of 100% and an anti-scratch-coating to avoid fine scratches in the lacquer. They are adjusted that hard elastic so that light dents in the wood do not lead to a breakage of the lacquer. The closed-pore antistatic varnish guarantees lowest soiling as well as easy cleaning without additional additives!

SEDA: Scheucher oils and waxes are based on natural resources and are fully oxidative drying, not film-forming and partially repairable.

Room climate Room temperature should be kept at a constant of 18–24°C and the relative humidity between 30% und 65%! This generally requires an appropriate air humidification in the heating season. We therefore recommend cold humidifiers with an integrated sterilization system. The installation of a Fidbox records your climate above and under your parquet floor, reports deviations from the optimum climate and can be conveniently monitored by mobile app.

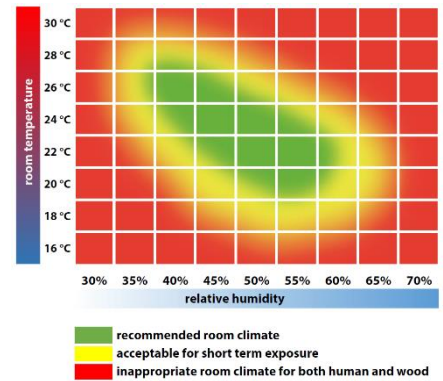

Fields of use Floors and walls, living and object area (meet the highest class C according to. ÖN C2354)