

ARMONICO_MULTI COLLECTION

Structure: Two-layers boards with crossed fibres Birch plywood support for the best stability of the platform

Nominal wear layer*: European Oak wood 4 mm (9/16") thick

Dimensions: Width: 140 / 190 / 230 mm about
5 1/2" / 7 1/2" / 9" about
Length: random from 700 mm (2' 4") up to 2400 mm (7' 11")
Thickness: 14/15 mm (9/16"-5/8")

Surface: Bevel, brushing

Installation: Glued down or floating

Recommended application: Residential, commercial

Installation on floor heating systems: Allowed

Wood selection: COUNTRY_Knots of different dimensions and cracks black filled

Milling: Industrial

Finish: LEGNORESINA®
Legnoresina® is a revolutionary protection / resin designed by Salis to give wood surfaces durability, performance and reliability never seen before

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner
Cleaning with neutral detergent "Deter wood" and soft damp cloth

Extraordinary maintenance: Spread "Re_vita" refresher onto the surface with a soft damp cloth

Emissions: The entire range of Salis finishes is compliant with CE regulation mark parameters



1P



2PW



2PC



3PW



3PC



4PW



4PC



5PW



5PC



6PW



6PC

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

*: Meaning the wear layer thickness before the manufacturing process of the surface

ARMONICO_MONO COLLECTION

Structure:	Two-layers boards with crossed fibres Birch plywood support for the best stability of the platform
Nominal wear layer*:	European Oak wood 4 mm (9/16") thick
Dimensions:	Width: 190 mm (9") Lenght: random from 700 mm (2' 4") up to 2400 mm (7' 11") Thickness: 14/15 mm (9/16"-5/8")
Surface:	Bevel, brushing
Installation:	Glued down or floating
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	SPECIAL_Rift, flamed, with small knots COUNTRY_Knots of different dimensions and cracks black filled
Milling:	Industrial
Finish:	LEGNORESINA® Legnoresina® is a revolutionary protection / resin designed by Salis to give wood surfaces durability, performance and reliability never seen before
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Cleaning with neutral detergent "Deter wood" and soft damp cloth
Extraordinary maintenance:	Spread "Re_vita" refresher onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



1P



2PW




2PC



3PW



3PC

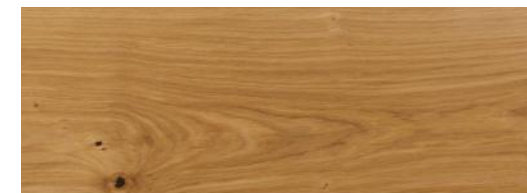

4PW



4PC



5PW



5PC



6PW



6PC

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

*: Meaning the wear layer thickness before the manufacturing process of the surface

ARMONICO_STRETTO COLLECTION

Structure:	Two-layers boards with crossed fibres Birch plywood support for the best stability of the platform
Nominal wear layer*:	European Oak wood 4 mm (9/16") thick
Dimensions:	Width: 45 mm (1 3/4") Length: from 700 mm (2' 4") up to 2000 mm (6' 6") Thickness: 14/15 mm (9/16"-5/8")
Surface:	Bevel, brushing
Installation:	Glued down
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	SPECIAL_Rift, flamed, with small knots COUNTRY_Knots of different dimensions and cracks black filled
Milling:	Industrial
Finish:	LEGNORESINA® Legnoresina® is a revolutionary protection / resin designed by Salis to give wood surfaces durability, performance and reliability never seen before
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Cleaning with neutral detergent "Deter wood" and soft damp cloth
Extraordinary maintenance:	Spread "Re_vita" refresher onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



1P




2PW



2PC



3PW

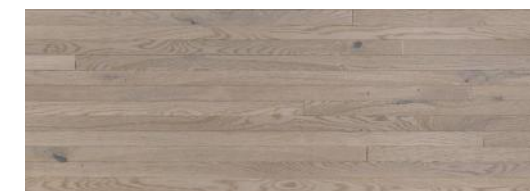

3PC



4PW




4PC




5PW



5PC

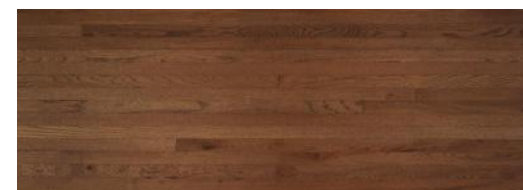

6PW

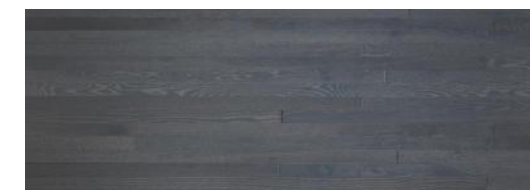


6PC

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY


*: Meaning the wear layer thickness before the manufacturing process of the surface

ARMONICO_SPINA COLLECTION


Structure:	Two-layers 45° cut boards with Birch plywood support
Nominal wear layer*:	European Oak wood 4 mm (9/16") thick
Dimensions:	Width: 90 mm (3 9/16") Length: 600/720 mm (2' / 2' 4") Thickness: 14/15 mm (9/16"-5/8")
Surface:	Bevel, brushing
Installation:	Glued down
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	SPECIAL_Rift, flamed, with small knots COUNTRY_Knots of different dimensions and cracks black filled
Milling:	Industrial
Finish:	LEGNORESINA® Legnoresina® is a revolutionary protection / resin designed by Salis to give wood surfaces durability, performance and reliability never seen before
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Cleaning with neutral detergent "Deter wood" and soft damp cloth
Extraordinary maintenance:	Spread "Re_vita" refresher onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters

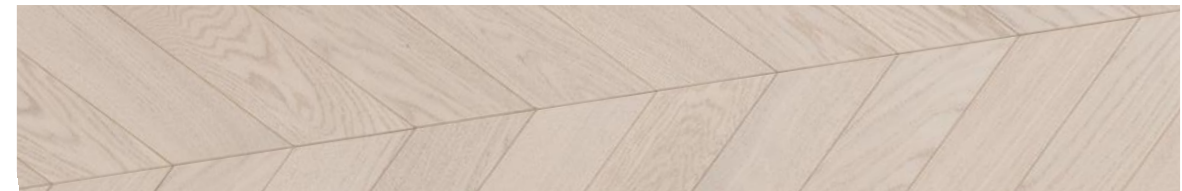


1P

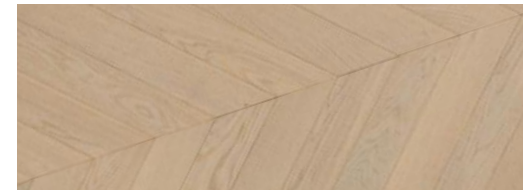


2PW

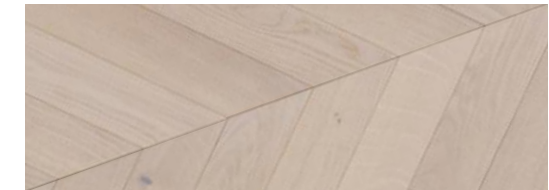

2PC

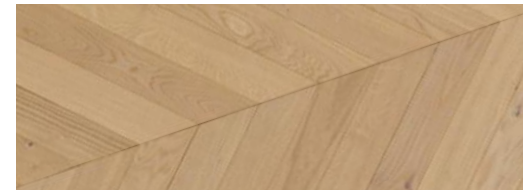


3PW

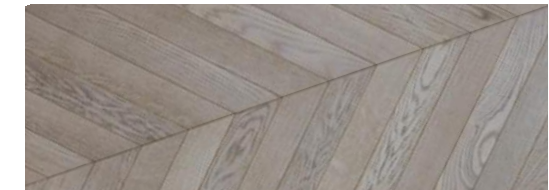


3PC




4PW

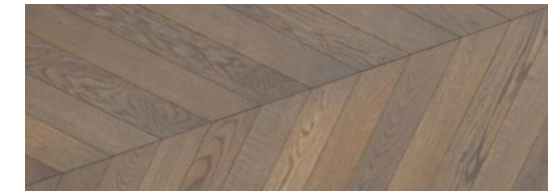


4PC

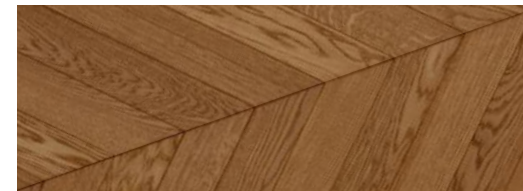


5PW

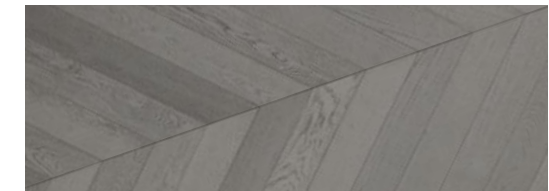

5PC

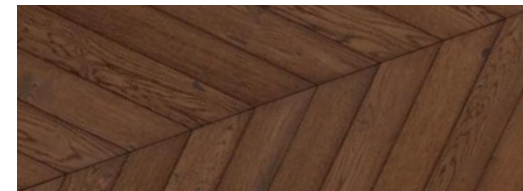

6PW

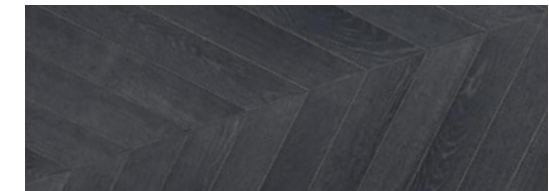

6PC

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY


*: Meaning the wear layer thickness before the manufacturing process of the surface

ACCESSORIES

TRANSITION PIECE

Dimensions:

Length 1000 mm abt (3'3")
Thickness 14/15 mm (9/16" | 5/8")

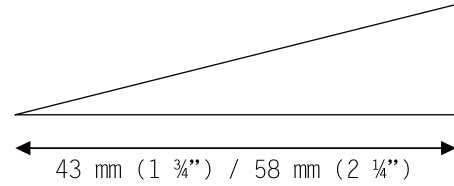


Matching thread for all colours
of the Armonico Project

BULLNOSE

Dimensions:

Height 30 mm (1 1/4")
Depth 80/110 mm (3 1/8" | 4 1/4")
Length 1000 mm abt (3'3")
Thickness 14/15 mm (9/16" | 5/8")

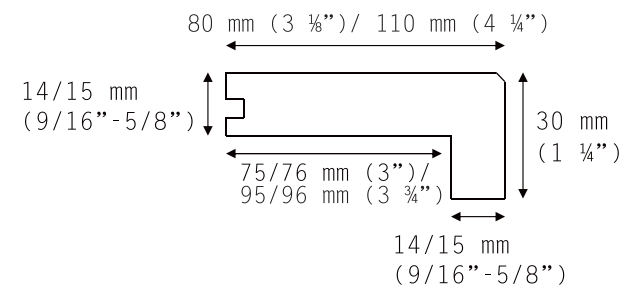


Matching bullnose for all colours
of the Armonico Project

SKIRTING

Dimensions:

Height 80 mm (3 1/4")
Length 2400 mm abt (8')
Thickness 13 mm (1/2")

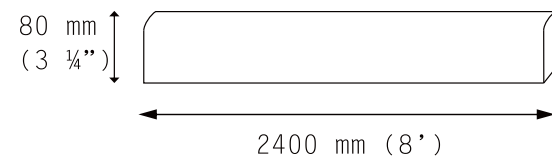

Matching skirting for all colours
of the Armonico Project

Note: the matching skirting will never be identical
to the woodflooring but just a close match.
Furthermore, unlike the floor, the skirting is without knots

