

DI VALORE COLLECTION_UNIQUE

Structure:	Two-layers boards with crossed fibres Birch plywood support for the best stability of the platform
Nominal wear layer*:	Old Oak wood 4 mm (1/6") thick
Dimensions:	Width: random from 70 mm (2¾") up to 200 mm (7¾") Length: random from 1000 mm (3'3") up to 2500 mm (8'7") Thickness: 14/15 mm (9/16"-5/8")
Surface:	Hand made bevel, uneven or brushed surface, handfilled knots
Installation:	Glued down or floating
Recommended application:	Residential
Installation on floor heating systems:	Allowed
Wood selection:	All wood grading
Milling:	Hand made
Finish:	OIL + WAX_ Fine mixtures of water based pigments + high performances air dried oil + beeswax finish
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Further coating with refresher "Re_vita". Spread onto the surface with a soft damp cloth
Extraordinary maintenance:	Cleaning with neutral detergent "Deter oil" and soft damp cloth. Further coating with beeswax
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



ANTICO BIANCO CASTELLO SBOZZATO



ANTICO SPAZZOLATO



ANTICO CHIARO SBOZZATO



ANTICO MEDIO SBOZZATO



ANTICO SCURO SBOZZATO

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

*: Meaning the wear layer thickness before the manufacturing process of the surface

DI VALORE COLLECTION_ TRAMA | TESSUTO | FILO

Structure:	Two-layers boards with crossed fibres Birch plywood support for the best stability of the platform																											
Nominal wear layer*:	Old Oak wood 4 mm (1/6") thick																											
Dimensions:	<table> <tr> <td>Filo:</td> <td>Width:</td> <td>45 mm (1 3/4")</td> </tr> <tr> <td></td> <td>Lenght:</td> <td>from 1000 (3' 3") up to 2000 mm (6'6")</td> </tr> <tr> <td></td> <td>Thickness:</td> <td>14/15 mm (9/16"-5/8")</td> </tr> <tr> <td>Trama:</td> <td>Width**:</td> <td>180 mm (7') about</td> </tr> <tr> <td></td> <td>Lenght**:</td> <td>270 mm (10' 5/8") about</td> </tr> <tr> <td></td> <td>Thickness:</td> <td>14/15 mm (9/16"-5/8")</td> </tr> <tr> <td>Tessuto:</td> <td>Width**:</td> <td>270 mm (10' 5/8") about</td> </tr> <tr> <td></td> <td>Lenght**:</td> <td>270 mm (10' 5/8") about</td> </tr> <tr> <td></td> <td>Thickness:</td> <td>14/15 mm (9/16"-5/8")</td> </tr> </table>	Filo:	Width:	45 mm (1 3/4")		Lenght:	from 1000 (3' 3") up to 2000 mm (6'6")		Thickness:	14/15 mm (9/16"-5/8")	Trama:	Width**:	180 mm (7') about		Lenght**:	270 mm (10' 5/8") about		Thickness:	14/15 mm (9/16"-5/8")	Tessuto:	Width**:	270 mm (10' 5/8") about		Lenght**:	270 mm (10' 5/8") about		Thickness:	14/15 mm (9/16"-5/8")
Filo:	Width:	45 mm (1 3/4")																										
	Lenght:	from 1000 (3' 3") up to 2000 mm (6'6")																										
	Thickness:	14/15 mm (9/16"-5/8")																										
Trama:	Width**:	180 mm (7') about																										
	Lenght**:	270 mm (10' 5/8") about																										
	Thickness:	14/15 mm (9/16"-5/8")																										
Tessuto:	Width**:	270 mm (10' 5/8") about																										
	Lenght**:	270 mm (10' 5/8") about																										
	Thickness:	14/15 mm (9/16"-5/8")																										
Surface:	Hand made bevel, uneven or brushed surface, handfilled knots, irregular cross etched (Saw marks)																											
Installation:	Glued down																											
Recommended application:	Residential																											
Installation on floor heating systems:	Allowed																											
Wood selection:	All wood grading																											
Milling:	Hand made																											
Finish:	OIL + WAX_ Fine mixtures of water based pigments + high performances air dried oil + beeswax finish																											
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Further coating with refresher "Re_vita". Spread onto the surface with a soft damp cloth																											
Extraordinary maintenance:	Cleaning with neutral detergent "Deter oil" and soft damp cloth. Further coating with beeswax																											
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters																											

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

*: Meaning the wear layer thickness before the manufacturing process of the surface



TRAMA_MEDIO



TESSUTO_NATURALE




FILO_BIANCO CASTELLO

** = The different elements of Trama and Tessuto patterns are delivered as loose pieces to install on the job site

Available in all 5 colours of Di_Valore collection

DI VALORE COLLECTION_CHEVRON

Structure:	Solid old reclaimed Oak wood 45° cut elements with T/G joints
Nominal wear layer*:	20 mm (¾") thick solid Old Oak wood
Dimensions:	Width: 90/110 mm (3 9/16" - 4 ¼") Length: 600/700 mm (2' - 2' 4") Thickness: 20 mm (3/4")
Surface:	Hand made bevel, uneven or brushed surface, handfilled knots
Installation:	Glued down
Recommended application:	Residential
Installation on floor heating systems:	Allowed
Wood selection:	All wood grading
Milling:	Hand made
Finish:	OIL + WAX_ Fine mixtures of water based pigments + high performances air dried oil + beeswax finish
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Further coating with refresher "Re_vita". Spread onto the surface with a soft damp cloth
Extraordinary maintenance:	Cleaning with neutral detergent "Deter oil" and soft damp cloth. Further coating with beeswax
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters

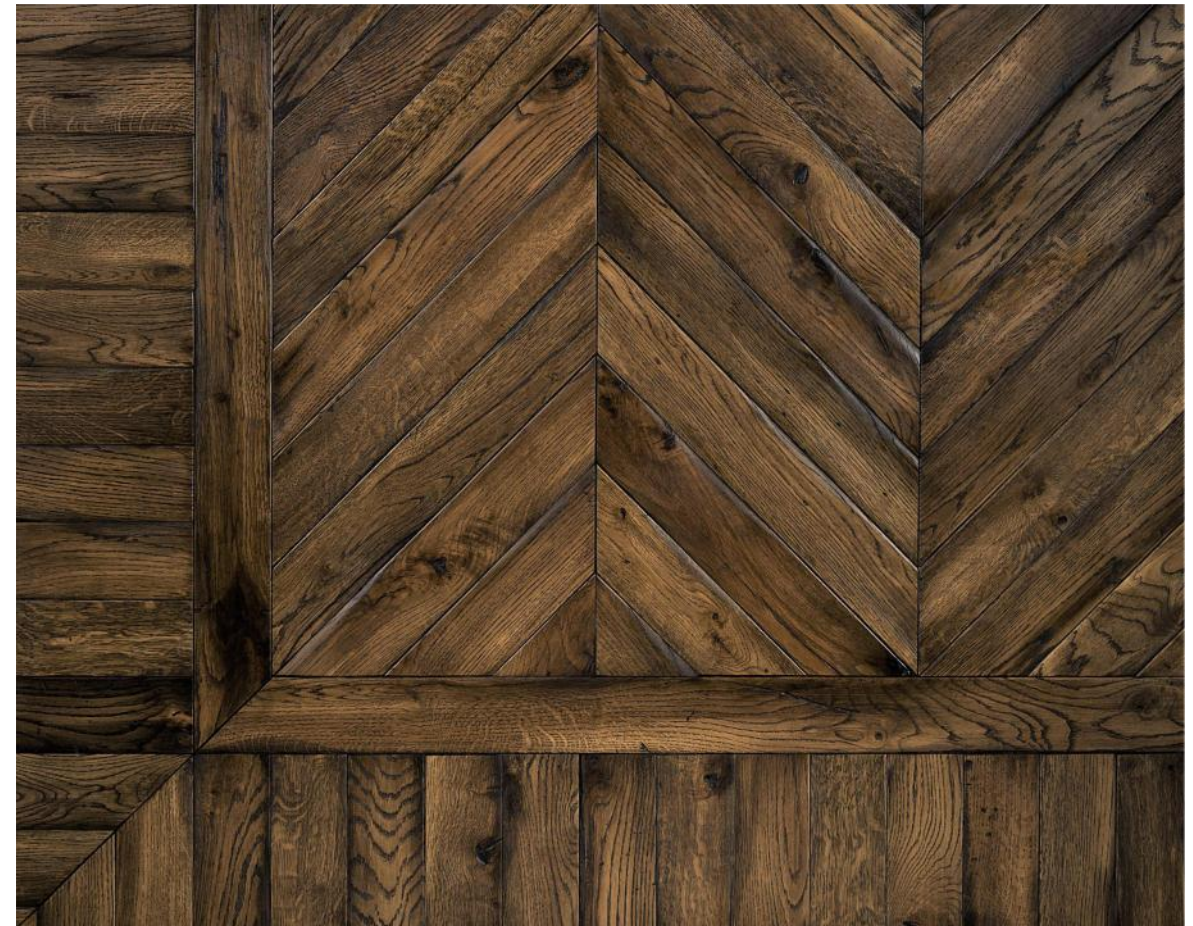

ANTICO BIANCO
CASTELLO
SBOZZATO

ANTICO
SPAZZOLATO

ANTICO CHIARO
SBOZZATO

ANTICO MEDIO
SBOZZATO

ANTICO SCURO
SBOZZATO

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION
MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

*: Meaning the wear layer thickness before the manufacturing process of the surface

DI VALORE COLLECTION_QUADROTTE

Structure:	Solid wood square tiles
Nominal wear layer*:	20 mm (¾") thick Old Oak solid wood
Dimensions:	Width: 1000 mm (3' 3") Length: 1000 mm (3' 3") Thickness: 20 mm (¾")
Surface:	Hand made bevel, uneven surface, handfilled knots
Installation:	Glued down
Recommended application:	Residential
Installation on floor heating systems:	Allowed
Wood selection:	All wood grading
Milling:	Hand made
Finish:	OIL + WAX_ Fine mixtures of water based pigments + high performances air dried oil + beeswax finish
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Further coating with refresher "Re_vita". Spread onto the surface with a soft damp cloth
Extraordinary maintenance:	Cleaning with neutral detergent "Deter oil" and soft damp cloth. Further coating with beeswax
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



VERSAILLES



CHANTILLY



ANTICO BIANCO CASTELLO SBOZZATO



ANTICO SBOZZATO



ANTICO CHIARO SBOZZATO



ANTICO MEDIO SBOZZATO



ANTICO SCURO SBOZZATO

_FLOORING ORDERED AT DIFFERENT TIMES OR REPLENISHMENTS OF THE SAME SELECTION MAY SHOW DIFFERENCES IN COLOURS AND SHADES COMPARED TO THE ORIGINAL SUPPLY

*: Meaning the wear layer thickness before the manufacturing process of the surface

DI VALORE COLLECTION_INTARSI

Structure:	Square tiles made in solid wood combined with different materials
Nominal wear layer*:	Old Oak solid wood in different thicknesses
Dimensions:	Width: 1000 mm (3' 3") Length: 1000 mm (3' 3") Thickness: from 15 mm (5/8") to 35 mm (1 6/16")
Surface:	Hand made bevel, uneven surface, handfilled knots
Installation:	Glued down
Recommended application:	Residential
Installation on floor heating systems:	Allowed
Wood selection:	All wood grading
Milling:	Hand made
Finish:	OIL + WAX_ Fine mixtures of water based pigments + high performances air dried oil + beeswax finish
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Further coating with refresher "Re_vita". Spread onto the surface with a soft damp cloth
Extraordinary maintenance:	Cleaning with neutral detergent "Deter oil" and soft damp cloth. Further coating with beeswax
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



CHARTRES COTTO



CHAUMONT ACCIAIO



CHAUMONT NERO ASSOLUTO



CHAUMONT TRAVERTINO NOCE



CHAUMONT POLVERE



CARRE' POLVERE



GAILLARD TRAVERTINO CHIARO



CHANTILLY POLVERE



CHANTILLY VETRO



CHAMBORD CHIARA/ ACCIAIO




CHAMBORD NATURALE/ ACCIAIO



CHAMBORD POLVERE



LANGAIS COTTO



LANGAIS POLVERE



VERSAILLES POLVERE



VERSAILLES NOCE/ TRAVERTINO

*: Meaning the wear layer thickness before the manufacturing process of the surface


ACCESSORIES

TRANSITION PIECE

Dimensions:

Length 1000 mm abt (3'3")
Thickness 14/15 mm (9/16" | 5/8")

Matching thread for all colours of the Di Valore collection

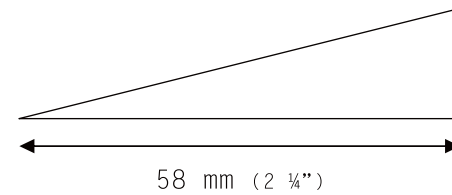


BULLNOSE

Dimensions:

Height 30 mm (1 1/4")
Depth 110 mm (4 1/4")
Length 1000 mm abt (3' 3")
Thickness 14/15 mm (9/16" | 5/8")

Matching bullnose for all colours of the Di Valore collection

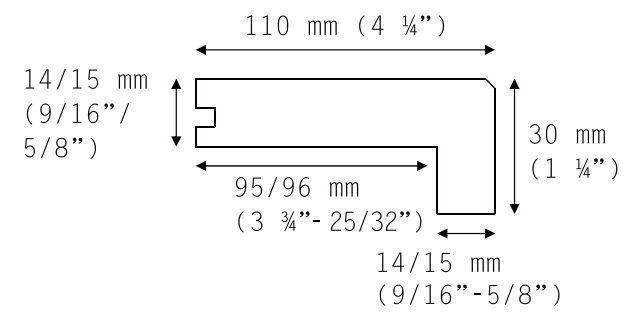

SKIRTING

Dimensions:

Height 80 mm (3 1/4")
Length 2400 mm abt (8')
Thickness 14/15 mm (9/16" | 5/8")

The skirting is made with the same wood and the same finish of the flooring



Di Valore





TAILOR MADE_

CUSTOM SALIS

Impossible is nothing_one of our key points is our ability for the tailor made. Custom manufacturing, finishing and patterns are offered to satisfy an always more demanding and updated market.

Each project is followed and developed through a team who's expertise and experience will lead to the best results, providing at the same time support and guarantee with the product.