


PRÊT-À-PORTER L COLLECTION


Structure:	Two-layers boards with crossed fibres Birch plywood support for the best stability of the platform
Nominal wear layer*:	European Oak wood 4 mm (1/6") thick
Dimensions:	Width: 120/140 mm (4'¾"-5 ½") Length: 1000/1250 mm (3' 3"- 4' 1") Thickness: 10 mm (¾")
Surface:	Bevel, light brushing
Installation:	Glued down
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	SPECIAL_Rift and flamed with frequent small knots COUNTRY_Knots of different dimensions and cracks black filled NOTE: ONLY THE LANA COLOUR IS AVAILABLE ALSO IN SPECIAL SELECTION
Milling:	Industrial
Finish:	VARNISH_ Easy Clean System, Silk Touch non absorbing protection
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Cleaning with neutral detergent "Deter wood" and soft damp cloth
Extraordinary maintenance:	Spread "Re_vita" refresher onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters



RASO

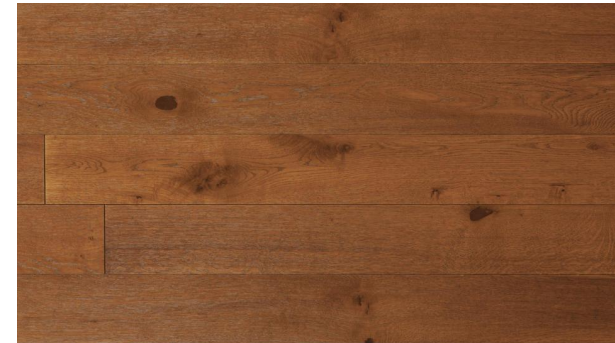

TELA

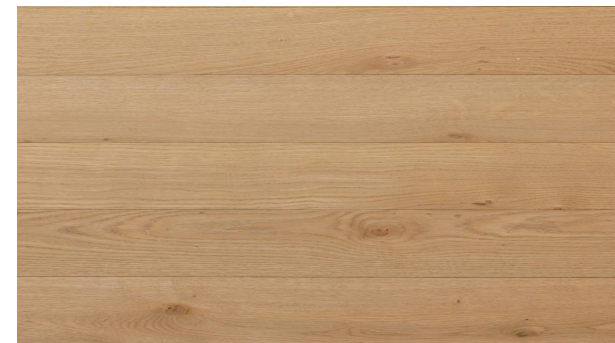

IUTA



VELO



LANA




LANA_SPECIAL

*: Meaning the wear layer thickness before the manufacturing process of the surface

PRÊT-À-PORTER XL COLLECTION

Structure:	Two-layers boards with crossed fibres Birch plywood support for the best stability of the platform
Nominal wear layer*:	European Oak wood 4 mm (1/6") thick
Dimensions:	Width: 180/ 195 mm (7 1/8"/ 7 3/4") Length: 1000/2000 mm (3' 3"-6' 6") Thickness: 13/14 mm (1/2"/ 9/16")
Surface:	Bevel, light brushing
Installation:	Glued down
Recommended application:	Residential, commercial
Installation on floor heating systems:	Allowed
Wood selection:	SPECIAL_Rift and flamed with frequent small knots COUNTRY_Knots of different dimensions and cracks black filled NOTE: ONLY THE LANA COLOUR IS AVAILABLE ALSO IN SPECIAL SELECTION
Milling:	Industrial
Finish:	VARNISH_ Easy Clean System non absorbing protection
Ordinary maintenance:	Swiffer - Dusting pad - Vacuum cleaner Cleaning with neutral detergent "Deter wood" and soft damp cloth
Extraordinary maintenance:	Spread "Re_vita" refresher onto the surface with a soft damp cloth
Emissions:	The entire range of Salis finishes is compliant with CE regulation mark parameters

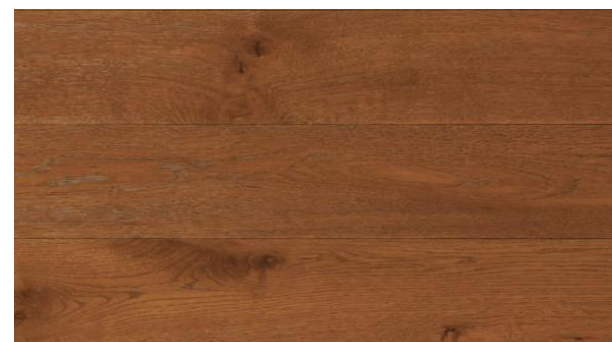


RASO



TELA



IUTA

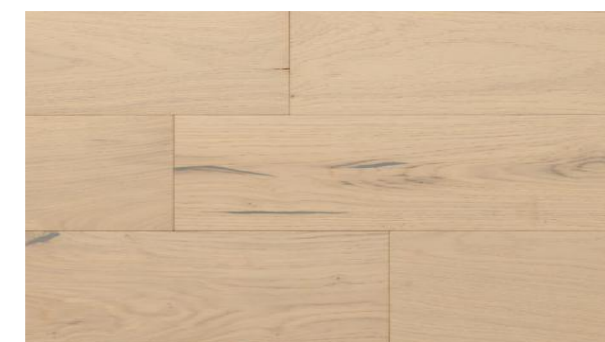

VELO



LANA



LANA_SPECIAL

*: Meaning the wear layer thickness before the manufacturing process of the surface


ACCESSORIES

TRANSITION PIECE

Dimensions:

Length 1000 mm abt (3' 3")
Thickness 10 mm ($\frac{3}{8}$ ")

Matching thread for all colours of the Prêt-à-Porter collection

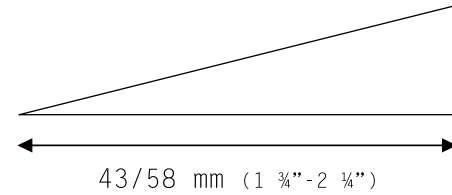


BULLNOSE

Dimensions:

Height 20/30 mm ($\frac{3}{4}$ ")
Depth 65/110 mm (2 $\frac{1}{2}$ " | 4 $\frac{1}{4}$ ")
Length 1000 mm abt (3' 3")
Thickness 10/13 mm ($\frac{3}{8}$ " | $\frac{1}{2}$ ")

Matching bullnose for all colours of the Prêt-à-Porter collection

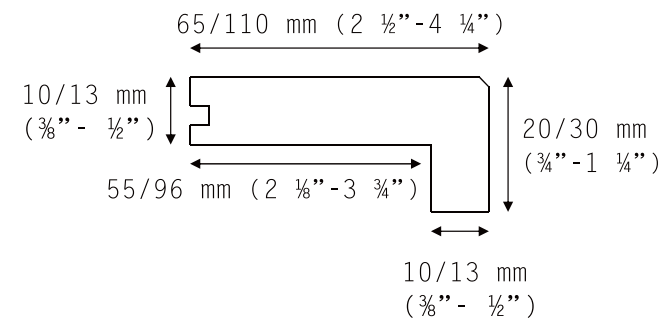

SKIRTING

Dimensions:

Height 80 mm (3 $\frac{1}{4}$ ")
Length 2400 mm abt (8')
Thickness 13 mm ($\frac{1}{2}$ ")

Matching skirting for all colours of the Prêt-à-Porter collection



Note: the matching skirting will never be identical to the woodflooring but just a close match. Furthermore, unlike the floor, the skirting is without knots

PRÊT A
PORTER

