# RICORDI

## RICORDI COLLECTION/ SBOZZATO

Structure: Two-layers boards with crossed fibres Birch

plywood support for the best stability of the

platform

Nominal wear layer\*: European Oak wood 4 mm (9/16") thick

Dimensions: Width: 4 different widths

90 / 142 / 192 / 242 mm

3 9/16" / 5 ½" / 7 ½" / 9 ¾"

Lenght: random from 700 mm (2' 4") up to 2400 mm (7' 11")

Thickness: 14/15 mm (9/16" - 5/8")

Surface: Bevel, uneven surface

Installation: Glued down or floating

Recommended application: Residential

Installation on floor

heating systems: Allowed

Wood selection: COUNTRY Knots of different dimensions and cracks

black filled

Milling: Hand made

Finish: OIL + WAX\_

Fine mixtures of water based pigments + high performances air dried oil + beeswax

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner

Further coating with refresher "Re vita".

Spread onto the surface with a soft damp cloth

Extraordinary maintenance: Cleaning with neutral detergent "Deter oil" and

soft damp cloth. Further coating with beeswax

Emissions: The entire range of Salis finishes is

compliant with CE regulation mark parameters



BIANCO SBOZZATO



CHIARO SBOZZATO



SCURO SBOZZATO



NATURALE SBOZZATO



MEDIO SBOZZATO

<sup>\*:</sup> Meaning the wear layer thickness before the manufacturing process of the surface



### RICORDI 45 COLLECTION/ SBOZZATO

Structure: Two-layers 45° cut boards with Birch plywood support

Nominal wear layer\*: European Oak wood 4 mm (9/16") thick

Dimensions: Width: 90 mm (1/6")

Lenght: 600/720 mm (2' / 2' 4") Thickness: 14/15 mm (9/16"-5/8")

Surface: Bevel, uneven surface

Installation: Glued down

Recommended application: Residential

Installation on floor

heating systems: Allowed

Wood selection: COUNTRY\_Knots of different dimensions and cracks

black filled

Milling: Hand made

Finish: OIL + WAX

Fine mixtures of water based pigments + high performances air dried oil + beeswax finish

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner

Further coating with refresher "Re\_vita".

Spread onto the surface with a soft damp cloth

Extraordinary maintenance: Cleaning with neutral detergent "Deter oil" and

soft damp cloth. Further coating with beeswax

Emissions: The entire range of Salis finishes is

compliant with CE regulation mark parameters



BIANCO SBOZZATO



CHIARO SBOZZATO



SCURO SBOZZATO



NATURALE SBOZZATO



MEDIO SBOZZATO

<sup>\*:</sup> Meaning the wear layer thickness before the manufacturing process of the surface

## RICORDI

## RICORDI COLLECTION/ SPAZZOLATO

Structure: Two-layers boards with crossed fibres Birch

plywood support for the best stability of the

platform

Nominal wear layer\*: European Oak wood 4 mm (9/16") thick

Dimensions: Width: 4 different widths

90 / 142 / 192 / 242 mm

3 9/16" / 5 ½" / 7 ½" / 9 ¾"

Lenght: random from 700 mm (2' 4") up to 2400 mm (7' 11")

Thickness: 14/15 mm (9/16" - 5/8")

Surface: Bevel, brushing

Installation: Glued down or floating

Recommended application: Residential

Installation on floor

heating systems: Allowed

Wood selection: COUNTRY Knots of different dimensions and cracks

black filled

Milling: Hand made

Finish: OIL + WAX\_

Fine mixtures of water based pigments + high performances air dried oil + beeswax

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner

Further coating with refresher "Re\_vita".

Spread onto the surface with a soft damp cloth

Extraordinary maintenance: Cleaning with neutral detergent "Deter Oil" and

soft damp cloth. Further coating with beeswax

Emissions: The entire range of Salis finishes is

compliant with CE regulation mark parameters



BIANCO SPAZZOLATO



CHIARO SPAZZOLATO



SCURO SPAZZOLATO



NATURALE SPAZZOLATO



MEDIO SPAZZOLATO

<sup>\*:</sup> Meaning the wear layer thickness before the manufacturing process of the surface



### RICORDI 45 COLLECTION/ SPAZZOLATO

Structure: Two-layers 45° cut boards with Birch plywood support

Nominal wear layer\*: European Oak wood 4 mm (9/16") thick

Dimensions: Width: 90 mm (1/6")

Lenght: 600/720 (2' / 2' 4")
Thickness: 14/15 mm (9/16"-5/8")

Surface: Bevel, brushing

Installation: Glued down

Recommended application: Residential

Installation on floor

heating systems: Allowed

Wood selection: COUNTRY\_Knots of different dimensions and cracks

black filled

Milling: Hand made

Finish: OIL + WAX\_

Fine mixtures of water based pigments + high performances air dried oil + beeswax finish

Ordinary maintenance: Swiffer - Dusting pad - Vacuum cleaner

Further coating with refresher "Re\_vita".

Spread onto the surface with a soft damp cloth

Extraordinary maintenance: Cleaning with neutral detergent "Deter oil" and

soft damp cloth. Further coating with beeswax

Emissions: The entire range of Salis finishes is

compliant with CE regulation mark parameters



BIANCO SPAZZOLATO



CHIARO SPAZZOLATO



SCURO SPAZZOLATO



NATURALE SPAZZOLATO



MEDIO SPAZZOLATO

<sup>\*:</sup> Meaning the wear layer thickness before the manufacturing process of the surface


# ACCESSORIES

#### TRANSITION PIECE

Dimensions:

Lenght 1000 mm abt (3'3")
Thickness 14/15 mm (9/16"|5/8")

Matching thread for all colours of the Ricordi collection




#### BULLNOSE

Dimensions:

Height 30 mm (1 ¼")
Depht 110 mm (4 ¼")
Lenght 1000 mm abt (3'3")
Thickness 14/15 mm (9/16"|5/8")

Matching bullnose for all colours of the Ricordi collection

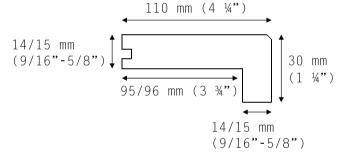

#### SKIRTING

Dimensions:

Height 80 mm (3 ¼") Lenght 2400 mm abt (8') Thickness 13 mm (½")

Matching skirting for all colours of the Ricordi collection



Note: The skirting of the Ricordi Collection is completely handmade, but, unlike the floor, is without knots and with a smooth surface.

